


## Cabinet Loudspeakers SLM6T 65010036



Material / Colour / Finish .....	Steel / White Ral 9010
Mounting .....	Two screws
Terminal .....	Ceramic terminals
Weight .....	1,2 kg
Rated / max. power .....	6 W / 6 W
IP-norm .....	NA
Max / min ambient temperature .....	90 °C / -20 °C
Standard version .....	50 V / 100 V transformer
Effective frequency range .....	160 – 16000 Hz
SPL 1W / 1m .....	90 db
Dispersion (-6dB) 1kHz / 4kHz .....	185° / 105°

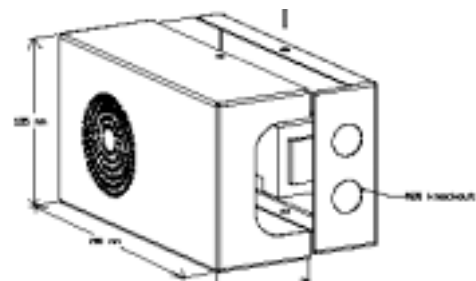

50 V / 100 V combined  
transformer with temp. fuse  
Primary connection:

5 (White) : 6 (Green) 50V  
5 (White) : 8 (Red) 100V

Secondary nominal tapings:

1 : 4 .....	6,0 W
1 : 3 .....	3,0 W
2 : 4 .....	2,0 W
1 : 2 .....	1,5 W
3 : 4 .....	0,8 W
2 : 3 .....	0,5 W

1W/1m 1/3 octave pink noise

