


Loudspeaker 65020100-66T




Specification

Material / Colour / Finish ABS / Light grey (RAL 9010)
 Mounting 4 screws
 Terminal Internal screw terminals
 Weight without / with transformer (T) 0.5 / 0.75 Kg
 Rated power / max. power 6 Watt / 10 Watt
 Max / min ambient temperature +90°C / -20 °C
 Impedance on request
 Standard model transformer 100V & 50V / 8 Ohm
 Effective frequency range 180 – 18000 Hz
 SPL 1W / 1m 88 dB
 Dispersion (-6dB) 1kHz / 4kHz 180° / 120°

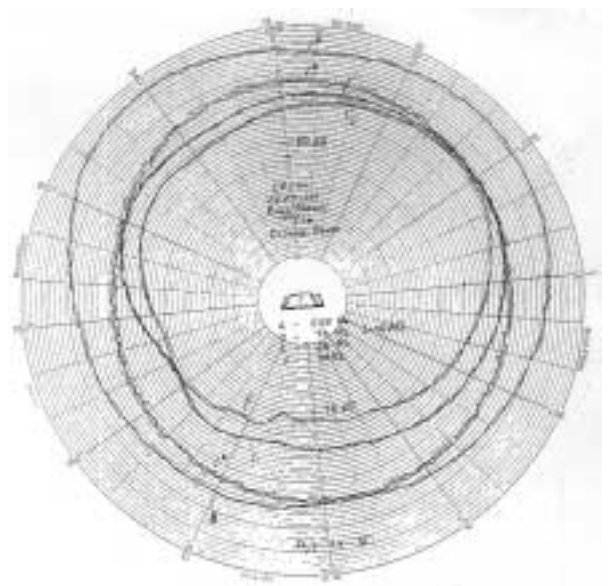

1W/1m 1/3 octave pink noise

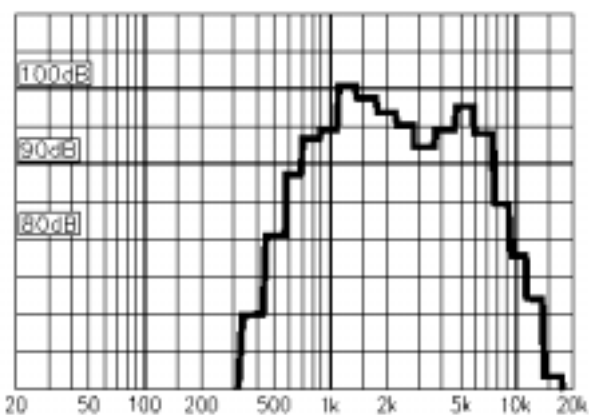

Transformer: 100/50 volt
 Secondary nominal tapings:

1 : 4	6,0 W
1 : 3	3,0 W
2 : 4	2,0 W
1 : 2	1,5 W
3 : 4	1,0 W
2 : 3	0,5 W

Morley Avenue
 Mapperley
 Nottingham
 NG3 5FW
 England

Tel: +44 (0) 115 955 11 99
 Fax: +44 (0) 115 955 19 19
 E-mail: spectorlumenex.uk@tycoint.com
 http: www.spector-lumenex.co.uk




tyco
 Engineering
 Services

Spector
 Lumenex


NOTES

- 1) LOUDSPEAKER TYPE :- S/L 85020100.
- 2) MATERIAL :- ABS.
- 3) COLOUR/FINISH :- LIGHT GREY (RAL 7035).
- 4) MOUNTING :- WALL/CEILING VIA 4No. SCREWS.
- 5) TERMINALS :- LOCATED INSIDE CHAMBER.
- 6) GLAND ENTRY :- VIA REAR.
- 7) WEIGHT :- 0.75Kg.
- 8) RATED POWER :- 6 WATTS.
- 9) MAXIMUM POWER R.M.S. :- 10 WATTS.
- 10) DISPERSION :- 110° @ 1000Hz, 120° @ 4000Hz.
- 11) I.P. RATING :- IP20.
- 12) AMBIENT TEMPERATURE :- +90°C/-20°C.
- 13) IMPEDANCE :- 8 OHMS.
- 14) EFFECTIVE FREQUENCY RANGE :- 150Hz/18KHz.
- 15) SPL 1W/1M :- 88dB.
- 16) TRANSFORMER TAPPINGS:


1-4	6W
1-3	3W
2-4	2W
1-2	1.5W
3-4	1W
2-3	0.5W



PLAN ELEVATION

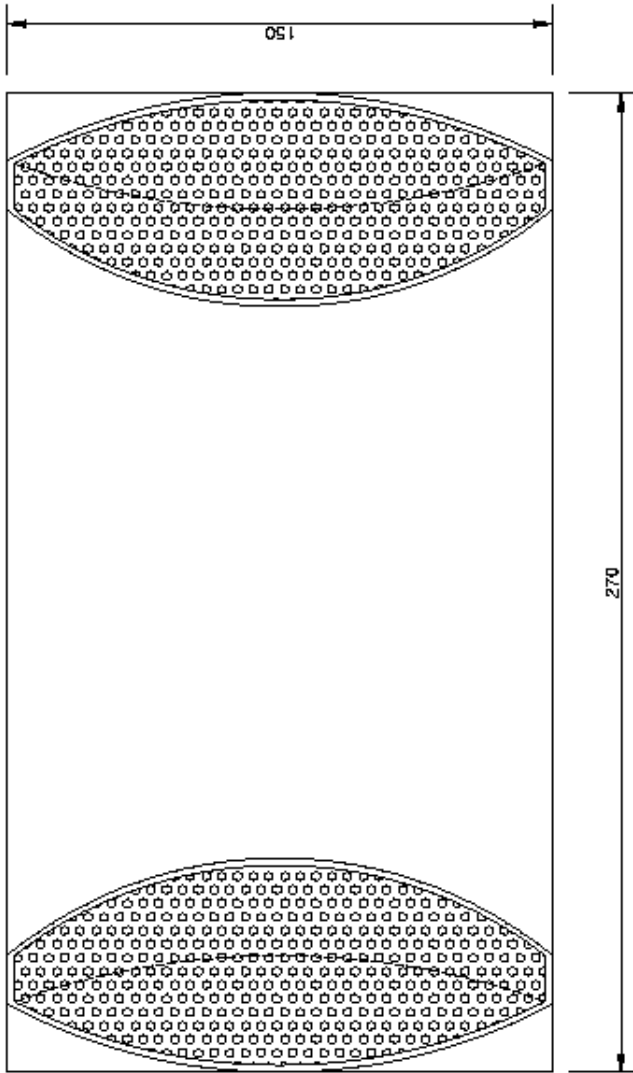

SIDE ELEVATION

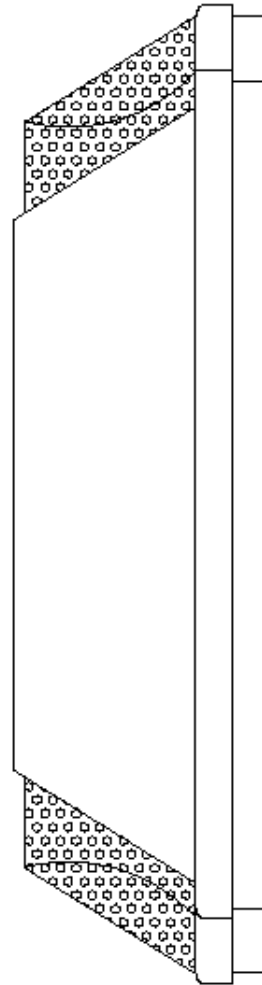

END ELEVATION

