


Ceiling Loudspeaker 65020300-560




Specification

Material / Colour / Finish	Aluminium / RAL9010
Mounting	Springs
Terminal	Spring clamp
Weight without / with transformer (T)	0.5 / 0.8 Kg
Rated power / max. power	6 Watt
IP Rating	42
Max / min ambient temperature	+90/ -20 °C
Impedance	on request
Standard model transformer	100V & 50V
Effective frequency range	180 – 15000 Hz
SPL 1W / 1m	90 dB
Dispersion (-6dB) 1kHz / 4kHz	170° / 60°

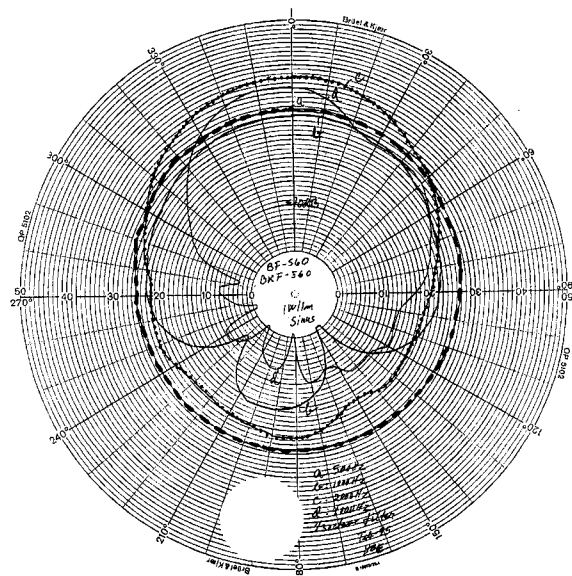

1W/1m 1/3 octave pink noise

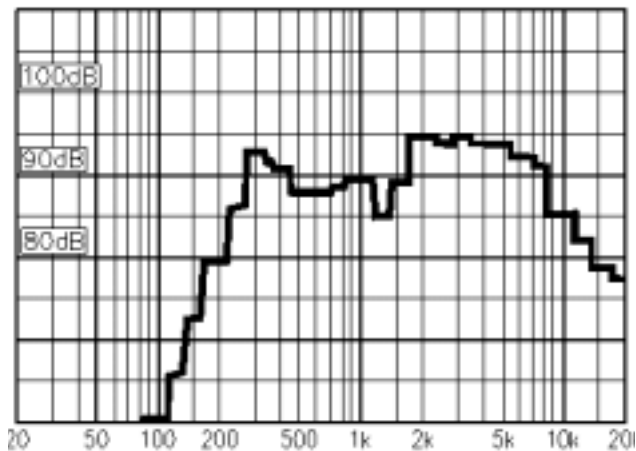

Transformer: 100/50 volt
Secondary nominal tapings:

common:4	6.0 W
common:3	3.0 W
common:2	1.5 W

Morley Avenue
Mapperley
Nottingham
NG3 5FW
England

Tel: +44 (0) 115 955 11 99
Fax: +44 (0) 115 955 19 19
E-mail: spectorldumenex.uk@tycoint.com
http: www.spector-lumenex.co.uk




tyco
Engineering
Services

Spector
Lumenex

NOTES:-

- 1) LUMINESCENER TYPE - S/L BEZEL/GRID.
- 2) MATERIAL - ALUMINIUM.
- 3) COLOUR/TINT :- WHITE (PHL 8000).
- 4) MOUNTING - CEILING VIA FIXTURES.
- 5) TERMINALS - SPRING LOAF.
- 6) CABLE ENTRY - VIA REAR.
- 7) MOUNTING - MA REAR.
- 8) MOUNTING - MA REAR.
- 9) MOUNTING - MA REAR.
- 10) MOUNTING - MA REAR.
- 11) MOUNTING - MA REAR.
- 12) MOUNTING - MA REAR.
- 13) MOUNTING - MA REAR.
- 14) MOUNTING - MA REAR.
- 15) MOUNTING - MA REAR.
- 16) MOUNTING - MA REAR.

FRONT VIEW

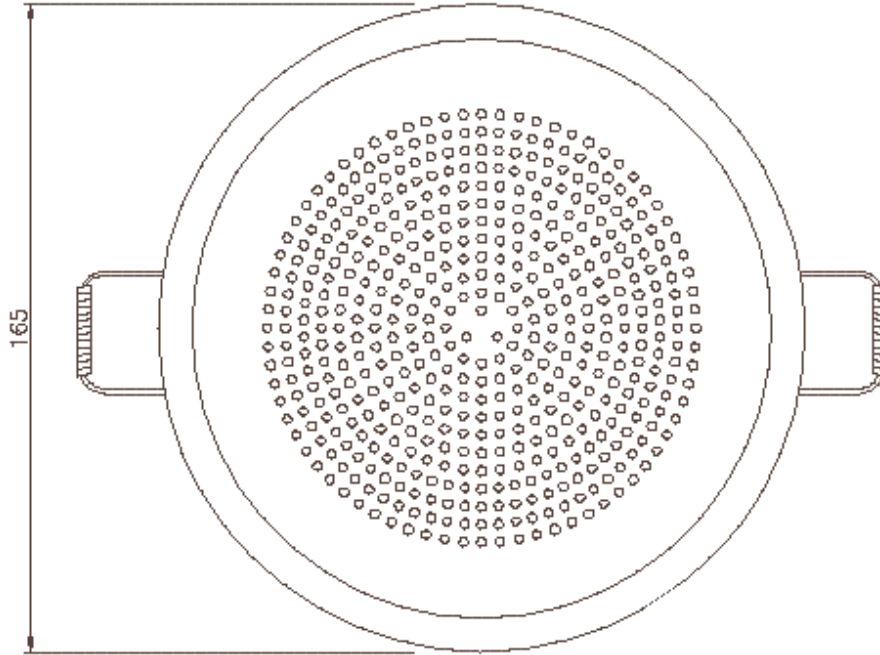

SIDE ELEVATION

