



Ceiling Loudspeaker SL65030106

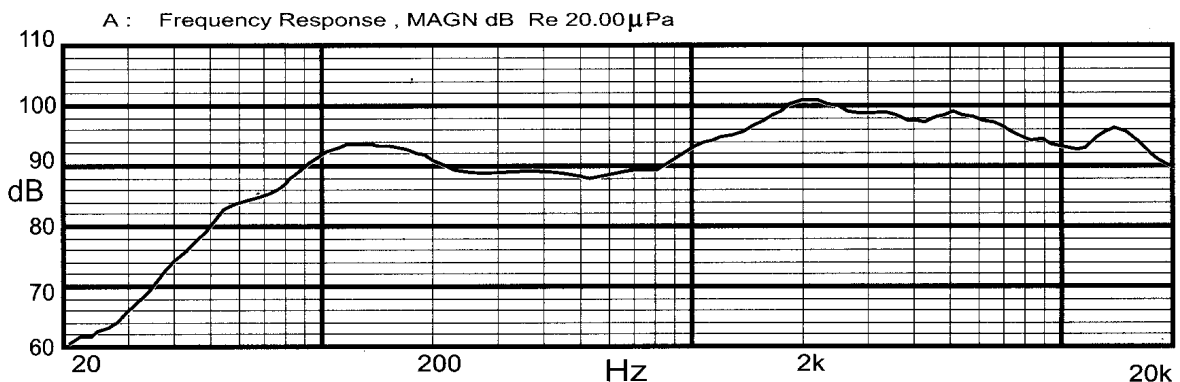

Specification

Material / Colour	Steel / White / RAL 9010
Mounting	Quick-on-spring catch bracket
Weight	1.45 Kg
Rated power / max power	.6 Watts
SPL 1W / 1m	93 dBA
Dispersion at 1000Hz	130 degrees
Transformer tapings 10 volt line	.6 / 3 / 1.5 / 0.7 Watts
Transformer impedance	1.67K / 3.33K / 6.66K / 13.3K
70.7 volt line	.3 / 1.5 / 0.75 / 0.375 Watts
Driver impedance	8 Ohms
SPL @ full power / 1m)	105 dB
Directivity Q factor, 1k	3.26 Hz

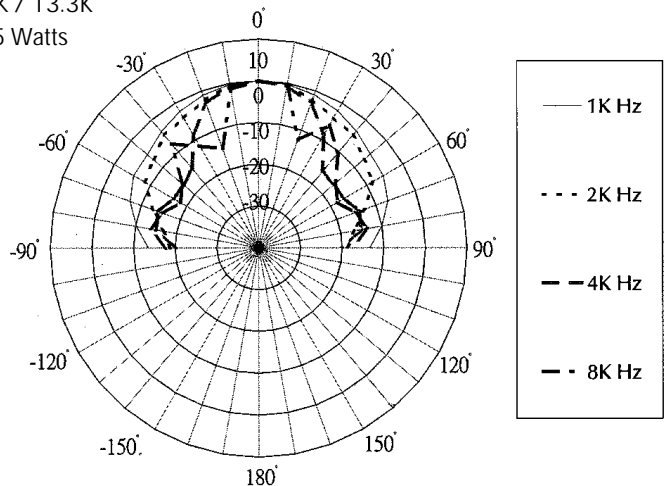

Morley Avenue
Mapperley
Nottingham
NG3 5FW
England

Tel: +44 (0) 115 955 11 99
Fax: +44 (0) 115 955 19 19
E-mail: spectorldumenex.uk@tycointl.com
http: www.spector-lumenex.co.uk



tyco
Engineering
Services

Spector
Lumenex

NOTES

- 1) MATERIAL : LOUDSPEAKER – STEEL, DOME – STEEL.
- 2) FINISH/COLOUR : PAINTED WHITE (RAL9010).
- 3) MOUNTING : QUICK-ON SPRING CATCH BRACKET.
- 4) WEIGHT : 1.43KGS.
- 5) RATED POWER : 6W.
- 6) DISPERSION @ 1KHz : 130°
- 7) Tx TAPPINGS 100V LINE : 6W/3W/1.5W/0.75W.
- 8) Tx IMPEDANCE OHMS : 1.67K/3.33K/6.66K/13.3K.
- 9) DRIVER IMPEDANCE & OHMS.
- 10) EFFECTIVE FREQUENCY RANGE : 110Hz – 20KHz.
- 11) SOUND PRESSURE LEVEL : 1W/1M, 83dB, 6W/1M, 105dB.
- 12) DIRECTIVITY & FACTOR, 1KHz : 3.26.
- 13) LOUDSPEAKER COMPLIANT WITH B.S. 5836. FOR THIS, FIELD CABLE MUST LOOP IN/OUT OF L/S AND TERMINATE AS SHOWN.

