

Bi-directional Loudspeaker 65010028




Specification

Colour / finish	Anodised or RAL 9010
Material	Aluminium
Termination	Cable 1m*
Weight	2.3 Kg
Rated / Max Power	.6 Watts / 8 Watts
IP Rating	0
Max/min ambient temp	+90°C / -40°C
Effective frequency range	150 - 9000 Hz
SPL, 1 Watt/1m	.85 db
SPL, Rated power 1 Watt/1m	.93 db
Fixing centres	157mm
Fixing hole diameter	.5mm
Dispersion at 1kHz/4kHz	150°/60°


* Termination is 1 metre flexible non flame retardant non armoured cable tail

70 / 100 Volt Line Transformer (70V line to special order)

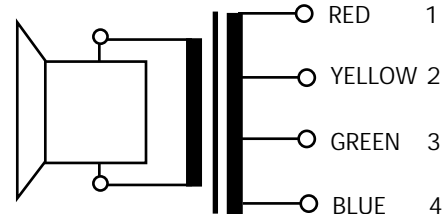

Primary nominal tapings:

1 : 2	6.0 W
2 : 3	3.0 W
3 : 4	1.5 W
1 : 3	1.0 W
2 : 4	0.5 W
1 : 4	0.3 W

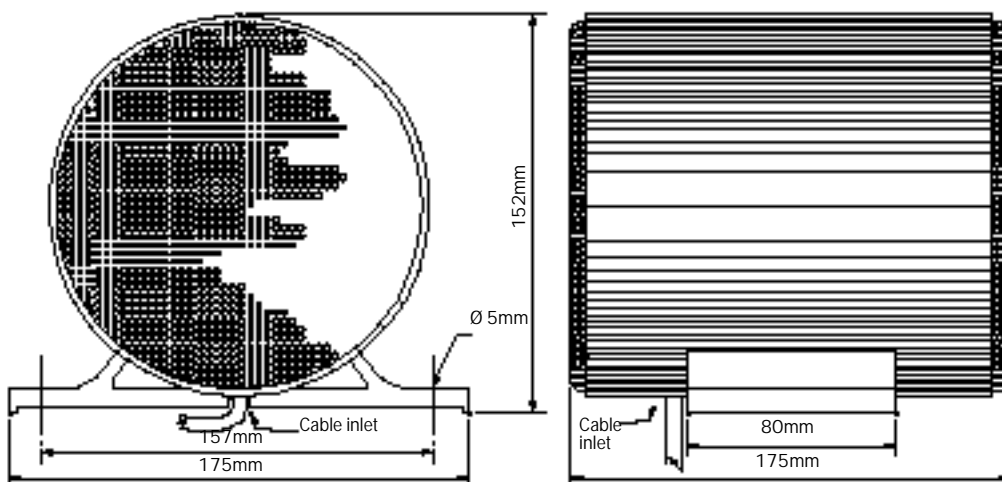

Morley Avenue
Mapperley
Nottingham
NG3 5FW
England

Tel: +44 (0) 115 955 11 99
Fax: +44 (0) 115 955 19 19
E-mail: spectorlumenex.uk@tycoint.com
http: www.spector-lumenex.co.uk



tyco

Engineering
Services

Spector
Lumenex

